MC-WU8461 LCD Projector

maxell



Easy to use installation projector with advanced features, 6,000 ANSI lumens brightness and WUXGA 1920 x 1200 resolution in a low profile design.



Key Features

- WUXGA 1920 x 1200 resolution
- 6,000 ANSI lumens white/color output
- HDBaseT and HDMI x 2 inputs
- 16 watt audio output
- 5000 : 1 contrast ratio
- 20,000 hours hybrid filter**
- HDCR/Accentualizer
- Picture by Picture and Picture in Picture
- Wide range of lens options
- Supports Web Control, PJLink, Crestron Connected®, and AMX

Maxell's installation-friendly MC-WU8461 LCD projector is designed to provide maximum presentation impact in mid to large venue applications. It offers a versatile array of innovative, performance-enhancing features along with advanced video display technology providing bold, brilliant colors with incredible image clarity and uniformity. Plus, with motorized zoom, focus and superior lens shift, and a variety of lens options, the MC-WU8461 is at the top of its class when it comes to installation flexibility. With a tough magnesium die cast body, the MC-WU8461 is one of the most durable projectors available today. All this, and with a lower cost of ownership. For added peace of mind, Maxell's MC-WU8461 is also backed by a generous warranty and our world-class service and support programs.

MC-WU8461

1.800.377.5887
www.maxellproav.com

MC-WU8461 LCD Projector

maxell

Quality, reliability and installation convenience.

From mid-size to very large auditoriums and conference halls, Maxell's MC-WU8461 LCD projector is the perfect solution. With 6,000 ANSI lumens brightness and WUXGA 1920 x 1200 resolution, the MC-WU8461 will deliver dynamic images guaranteed to dazzle any audience. Incorporating Maxell's leading-edge technology, the MC-WU8461 features Maxell's Accentualizer for advanced image processing, long lamp life, a variety of lens options to accommodate your specific application, and is




wireless presentation compatible. Plus, embedded networking gives you the ability to manage and control multiple projectors over your LAN (scheduling of events, centralized reporting, image transfer, and e-mail alerts). Even with the array of advanced features, Maxell's MC-WU8461 is designed for user-friendly operation and installation convenience.

UNIQUE FEATURES

Accentualizer


Maxell original technology makes pictures look more real by enhancing sharpness, gloss and shade to make pictures as clear as pictures on a flat-panel device. You can also adjust the effects by three levels according to your surroundings so that the colors of projected images are the actual colors of the objects they represent.

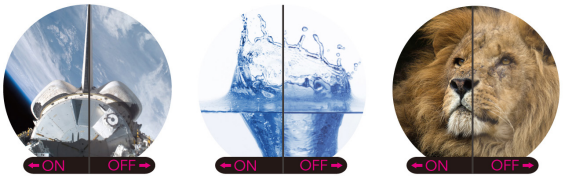

Sharpness *Gloss* *Shade*

HDCR (High Dynamic Contrast Range)


When average projectors are used in bright rooms, the darker colors of an image deteriorate and images become unclear. Using this function, blurred images caused by room lighting or outside light sources are corrected, and an effect similar to increasing contrast occurs. This results in clear images even in bright rooms.

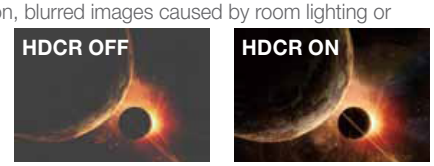

DICOM® Simulation Mode

The DICOM (Digital Imaging and Communications in Medicine) Simulation Mode projects grayscale images which approximate DICOM Part 14 specifications. This mode is ideal for viewing grayscale medical images, such as X-rays, for training and educational purposes.

The projectors have a DICOM (Digital Imaging and Communications in Medicine) Simulation Mode. This mode simulates the DICOM standard, which is a standard applicable to digital communications in medicine, and is useful for displaying medical images such as X-rays. These projectors are not medical devices and are not compliant with the DICOM standard, and neither the projector nor the DICOM Simulation Mode should be used for medical diagnosis. Comparison photos are simulations.

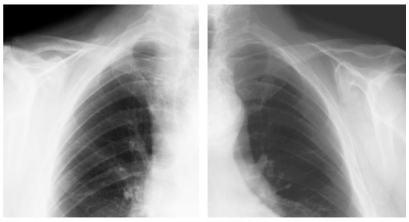

Standard Mode DICOM Simulation Mode

Multiple Lens Options


Projectors achieve a brightness of the highest class in the industry by adopting a short arc length lamp with a small F-number lens. There are a variety of lenses to use for this projector, all providing specified projector brightness! In addition to the one ML703 middle throw standard lens, six optional lenses are available: FL701 fixed, SL702 and SL712 short throw, ML713 middle throw, LL704 long throw and UL705 ultra-long throw.



Short arc length lamp Small F-number lens

Picture by Picture and Picture in Picture

Images from two input signals at the same time. Picture by Picture (P by P) enables you to compare two images side by side. Picture in Picture (P in P) enables you to display one image within another image. These functions are handy when you need to compare two sets of data or other material.

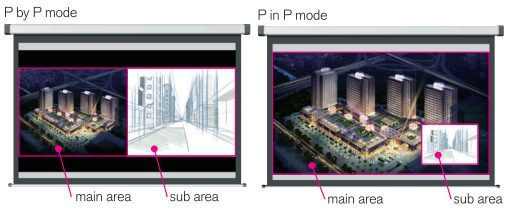

360° Rotation

Display rotation of 360° for creative applications and greater installation flexibility.



MX0670-Rev.1-11/19
All specifications subject to change without notice.
©2019 Maxell Corporation of America. All Rights Reserved.

Maxell Corporation of America
Toll Free: 1.800.377.5887
Web: www.maxellproav.com

MC-WU8461 LCD Projector

maxell

STANDARD FEATURES

Center Lens Design: This feature makes it easy to align the projector with the center of the screen for faster and trouble-free setup.

Motorized Zoom, Focus and Lens Shift Control: Allows for greater range of installation possibilities. With the motorized function you can make fine adjustments through the remote control or RS232/IP device.

Perfect Fit: Enables the user to adjust individual corners independent of one another. This feature helps correct geometric and complicated distortions. Perfect Fit allows the projected image to fit correctly to the screen quickly and easily.

Projector Quick Connection App For Mobile Devices: Our iOS and Android applications offers projector control and also provides the capability to display photos, document files and web site contents. Available for iPad®, iPhone® and Android devices. Works over your LAN via your RJ-45 port or via an optional USBWL11N wireless adapter.

Status Monitor: With Maxell's status monitor, you'll have access in real time to projector diagnostics. Status updates include configuration information, maintenance history, as well as error and alarm messaging.

Wired and Wireless Switcher Solutions: Multifunctional switcher operates in conjunction with the receiver to provide expanded source selection and switching options for connected devices. The switcher is sold as an optional accessory that can provide 1080p 30 fps wireless via WHDI for both video and audio.

Network Control, Maintenance and Security: Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, image transfer and e-mail alerts for reactive and routine maintenance.

PC-Less Presentation: By using a USB memory stick or other storage device, you can use the projector without a computer. Menus are easy to see with a thumbnail display. Additionally there is also a slideshow function.

PJMessenger: PJMessenger function allows you to send and display text messages and audio alerts on your networked projectors. It is an easy and efficient way to send announcements out to multiple units.


Wireless Presentation Compatible: Connect the projector to a a computer or your network using the optional USB wireless adapter (part number USBWL11N). The adapter supports IEEE802.11b/g and the latest 11n.



Front View



Top View

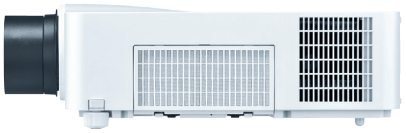


Side Profile



Rear View

Input/Outputs

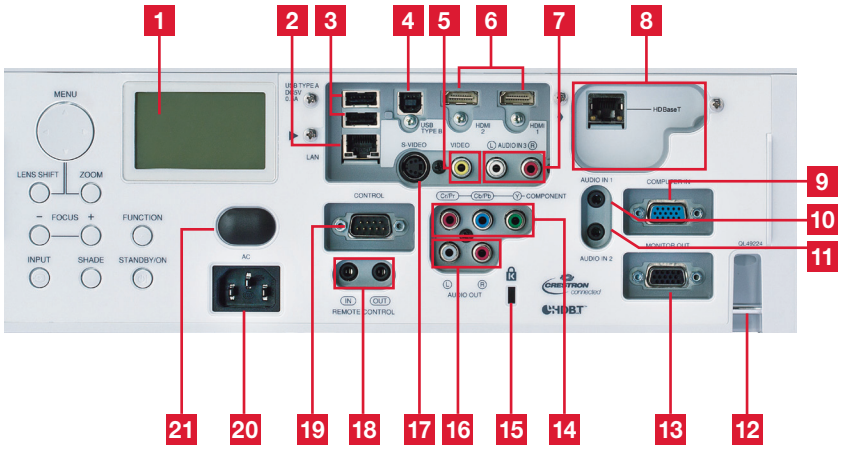

1. Status Monitor
2. LAN
3. USB Type A
4. USB Type B
5. Composite Video
6. HDMI x 2
7. Audio in 3
8. HDBaseT
9. Computer in 1
10. Audio in 1
11. Audio in 2
12. Security Bar
13. Monitor Out
14. Component
15. Kensington Lock
16. Audio Out
17. S-Video
18. Remote Control
19. Control (RS-232C)
20. AC Inlet
21. Remote Sensor

MC-WU8461

MX0670-Rev.1-11/19
All specifications subject to change without notice.
©2019 Maxell Corporation of America. All Rights Reserved.

Maxell Corporation of America
Toll Free: 1.800.377.5887
Web: www.maxellproav.com

MC-WU8461 LCD Projector

maxell

Accessories and Lenses

Supplied Accessories	Remote control, power cord, computer cable, one standard ML703 lens, AA batteries x 2, adapter cover, security label, manual CD, user's manual, application CD
Optional Accessories	USBWL11N USB wireless adapter
Optional Lenses	5 optional lenses are available: FL701, SL712, ML713, LL704, UL705

Replacement Parts

Lamp	DT01471M
Remote Control	HL02801
Filter	UX38242

Projection Throw Chart

Screen Size 16:10		Throw Distance	
Diagonal	**Width**	**Min**	**Max**
30	25	38	76
80	68	101	202
100	85	127	252
150	127	190	377
200	170	253	503
250	212	316	628
300	254	379	754
600	509	758	1507

Throw Ratio: 1.5 - 3.0 : 1 (distance : width)
Screen size and throw distance are measured in inches with standard lens ML703.

Projection Lens Chart

Lens	Inches	Meters
ML703	127 - 252	3.2 - 6.4
FL701	69	1.8
SL712	100 - 151	2.5 - 3.8
ML713	146 - 248	3.7 - 6.3
LL704	240 - 407	6.1 - 10.3
UL705	407 - 691	10.3 - 17.6

Projection distances measured in inches and meters with standard lens and optional lenses when projecting onto a 100" diagonal screen.

CRESTRON connected

AMX DISCOVERY

Specifications

Display	**Projection Technology**	3LCD, 3 chip technology
	Resolution	WUXGA - 1920 x 1200
	White Light Output	6,000 ANSI lumens
	Color Light Output	6,000 ANSI lumens
	Colors	16.7 million colors
	Aspect Ratio	Native 16:10 and 4:3 / 16:9 compatible
	Contrast Ratio	5000 : 1 (using active IRIS)
	Throw Ratio (distance : width)	1.5 - 3.0 : 1 (with standard lens)
Lens & Operation	**Lens**	f = 24 - 48 mm (with standard lens) x 2.0 motorized zoom, focus & lens shift
	Lamp Wattage	365W
	Expected Lamp Life*	Approximately 2,000 hours (standard mode) 2,500 hours (Eco mode)
	Expected Filter Life**	Approximately 20,000 hours
	Speaker Output	16W (8W x 2 stereo)
	Keystone	H: +/- 7.5° and V: +/- 35°
Compatibility	**Computer**	VGA, SVGA, XGA, WXGA, WXGA+, SXGA, SXGA+, WSXGA+, UXGA, WUXGA, MAC16"
	H-Sync	15 kHz - 106 kHz
	V-Sync	50 Hz - 120 Hz
	Composite Video	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	Component Video	480i, 480p, 576i, 720p, 1080i, 1080p
	HDMI	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS clock 27 MHz - 150 MHz
Connectors	**Digital Input**	HDMI x 2 (HDCP compliant), HDBaseT x 1
	Computer Input 1	15-pin mini D-sub x 1
	Computer Monitor Output	15-pin mini D-sub x 1
	Video Input	
	S-Video	Mini DIN 4-pin x 1
	Composite Video	RCA jack x 1
	Component Video	RCA jack x 3, 15-pin mini D-sub (shared with computer in 1)
	Audio Input	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1
	Audio Output	RCA jack (L/R) x 1
	Network LAN Wired	RJ45 jack x 1
	Network LAN Wireless	USB wireless adapter (Optional)
	HDBaseT	RJ45 jack x 1
	USB	Type A x 2 (PC-less presentation, wireless adapter) Type B x 1 (USB display or mouse control)
	Control Terminals	9-pin D-sub x 1 (RS-232 control)
Ratings & Warranty	**Power Supply**	AC100-120V / AC220-240V, 50/60Hz
	Power Consumption	550W
	Operating Temperature	32°F - 113°F (0°C - 45°C)
	Dimensions (W x D x H)	19.6" x 15.6" x 5.3" (without lens)
	Weight	Approximately 20.3 lbs
	Approvals	UL 60950-1 / cUL FCC Part 15 subpart B class A
	Warranty	3-year limited parts and labor Extended Service Contract available (additional cost)

* Actual lamp life will vary by individual lamp and based on environmental conditions, selected operating mode, user settings and usage. Hours of average lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

** Actual filter life will vary by individual filter and based on environmental conditions, selected operating mode, user settings and usage. Hours of average filter life specified are not guaranteed and do not constitute part of the product warranty.

3LCD HDBT CC HDMI 3 YEAR WARRANTY

MX0670-Rev.1-11/19
All specifications subject to change without notice.
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation. Crestron®, Crestron®, Crestron e-Control®, e-Control®, Crestron Connected®, Fusion RV®, Crestron RoomView® and RoomView™ are trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and other countries. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. All other brand or product names are trademarks or registered trademarks of their respective holders.
©2019 Maxell Corporation of America. All Rights Reserved.

Maxell Corporation of America
Toll Free: 1.800.377.5887
Web: www.maxellproav.com

YouTube